

**THE OSTERBERG LOAD TEST METHOD FOR
BORED AND DRIVEN PILES THE FIRST TEN YEARS**

by

Jorj O. Osterberg, Ph.D.

Professor of Civil Engineering Emeritus, Northwestern University
Consulting Geotechnical Engineer, Aurora, Colorado

ABSTRACT

Ten years have passed since the first full-scale Osterberg Load Test was performed. Approximately 300 tests have been made in ten countries. Tests have been made on bored piles (drilled shafts), barrette piles, driven pipe piles, and driven precast concrete piles to depths up to 90 m (300 ft) and pile diameters up to 3 m (10 ft.). Test loads up to 135 MN (15,000 tons) have been applied. The loading device, called an O-cell, when placed on or near the bottom of the pile and pressurized internally, applies an equal upward and downward load, thus determining the side shear and end bearing separately. There is no need for a dead load to react against or hold down piles as required in a conventional test. Experience has shown that the ultimate side shear for the great majority of the tests is larger and sometimes much larger than that assumed by the designer. In the few cases where the side shear was low, it was due to the method of drilling the hole. Insufficient cleaning and preparation of the bottom of the hole, indicated by large initial downward deflection of the bottom of the pile, was apparent in many cases. Because the side shear was so much larger than that assumed, the working load when applied to the top of the pile would be mostly resisted by the side shear and little of the load would reach the bottom. The writer is disappointed that in many cases the design engineer was only interested in proving that the ultimate capacity exceeded the design load by a required factor of safety and was not interested in using the test results to design a more economical pile.

INTRODUCTION

Bored Piles

The Osterberg Load Cell (also called O-cell) consists of a specially designed hydraulic jack capable of exerting very large loads at high internal pressures. Fig.1 is a schematic diagram illustrating how the load cell works. A small amount of concrete is placed on the bottom of a bored pile hole after which the O-cell is lowered into the hole, which is then filled with concrete. A pipe welded to the top of the center of the cell extending to above the ground surface acts as a conduit for applying fluid pressure to the previously calibrated cell. Inside the pipe is a smaller pipe connected to the bottom with an open end. It extends to the surface and emerges from the large pipe through an O-ring seal. This pipe acts as a tell-tale to measure the downward movement of the bottom of the cell as load is applied. The fluid for applying the pressure can be oil or water. The liquid most often used is water with a small amount of miscible oil added to keep the pump equipment from rusting. After the concrete has reached its desired strength, the cell is pressurized internally creating an upward force on the bottom of the shaft and an equal but opposite force in end bearing. As the pressure increases, the telltale moves downward as the load in end bearing increases and the shaft moves upward as the side shear on the shaft is mobilized. It should be noted that at all times the total side shear resistance above the O-cell is equal to the end bearing. Because of this no reaction load

or hold down piles with a frame is needed as in the conventional test where the load is applied downward on the pile head.

The downward movement is measured by the dial gage 2, and the upward movement of the top of the concrete is measured by dial gage 1. Not shown on the figure is a pipe extending from the top of the load cell to above the surface in which is a telltale rod that measures the upward movement of the top of the cell. Thus, the difference between the measurement of this rod and dial gage 1 gives the compression of the concrete. From the data obtained as the load is increased, the load-upward movement curves and the load-downward movement curves can be plotted. After the test is completed, the area below the bottom of the O-cell and the cell chamber can be grouted if the pile is to be used as a working pile. The majority of the piles that

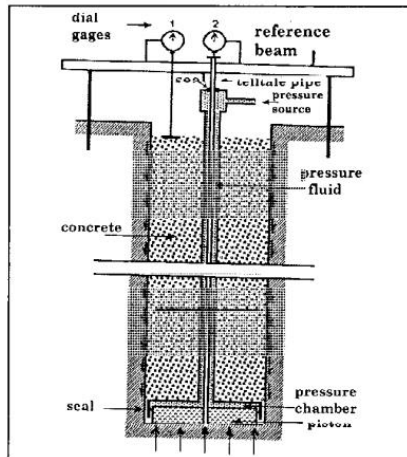


Figure 1 - Osterberg Cell Schematic

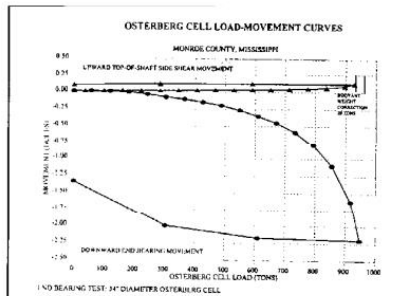


Figure 2 - Load Deflection Curves
 (Ultimate Side Shear Value is Reached)

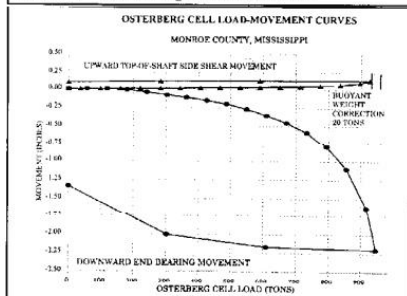


Figure 3 - Load Deflection Curves
 (Ultimate End Bearing Value is Reached)

have been tested have been working piles.

As the pressure increases, the ultimate value in either side shear or end bearing is reached or the load capacity of the O-cell is reached. Fig. 2 shows a typical set of load-deflection curves for a test. In this case ultimate was reached in side shear and the end bearing did not reach its ultimate value. It should be noted that the ultimate in side shear is usually reached at small movements, about 5-10 mm (1/4 - 1/2 inch) for clays and somewhat larger movements for sand. Fig. 3 shows a typical case where the ultimate is reached in end bearing. Notice that even though the downward movement has reached 2.2 inches (56 mm) the upward movement is only 0.1 inch (2.5 mm).

As the piles tested became larger and larger in diameter and more of the piles had reinforcement cages extending to the bottom, the center pipe was in the way during installation and it was found much easier to use the arrangement shown in Fig. 4. However, the arrangement shown in Fig. 1 is still used for small diameter bored piles and for some of the driven piles. In Fig. 4, it is seen that the hydraulic supply lines (consisting of high pressure hoses) and the telltale rods are at two locations 180 degrees apart. Also, the opening of the cell as pressure is applied is measured by vibrating wire strain gages. The dial indicator readings, pressure transducer readings and strain gage readings are all recorded on a data logger.

Loads can be applied at any rate, can be held at a given magnitude for any time interval required, and the pile retested after weeks, months or even years. The most common loading sequence used is the ASTM Quick Test Method D1143 (ASTM 1993). The O-cells range in capacity from 670 kN (75 tons) to 27 MN (3000 tons) (in each direction) and in diameter from 133 mm (5 1/4 inches) to 870 mm (34 inches). The total stroke is 150 mm (6 inches). However, in Japan where many cycles of loadings are used, the total stroke is 150 mm (12 inches). Where test loads larger than 27 MN (3000 tons) in each direction are required, two or more O-cells are used. For example in the largest test made to date of 135 MN (15,000 tons) (up and down). Three cells placed between two rigid plates were used.

Driven Piles

Tests have been made on pipe piles and pre-cast concrete piles. For pipe piles the O-cells are welded directly to the bottom of the pipe and driven with the pipe as shown diagrammatically in Fig. 5, shown at the right.

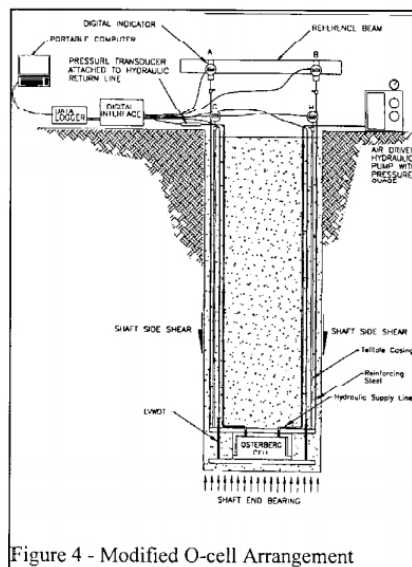


Figure 4 - Modified O-cell Arrangement

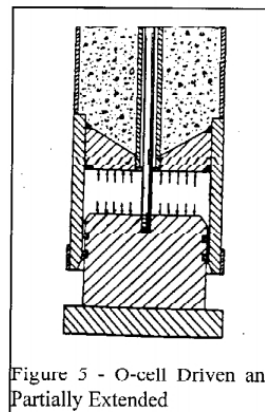


Figure 5 - O-cell Driven and Partially Extended

Fig. 6 shows a cell cast into a concrete pile and in place ready for testing. This pile has a square cross-section 460x460 mm (18x18Inches). The pile was designed for installation at 5 different locations with 5 different soil conditions to determine the increase in side shear over a 2 year period. The hand pump, dials and auxiliary equipment was moved from site to site as testing at increasing time intervals proceeded. Similar tests have been made on larger pre-cast square concrete piles and on pre-cast circular concrete piles.

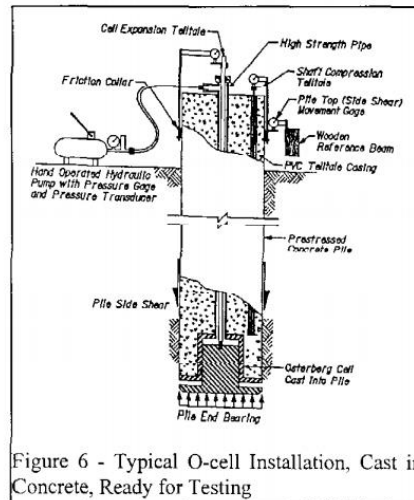


Figure 6 - Typical O-cell Installation, Cast in Concrete, Ready for Testing

Applications

Tests have been made on bored piles with the O-cell placed in various locations in the pile as shown in Fig. 7.

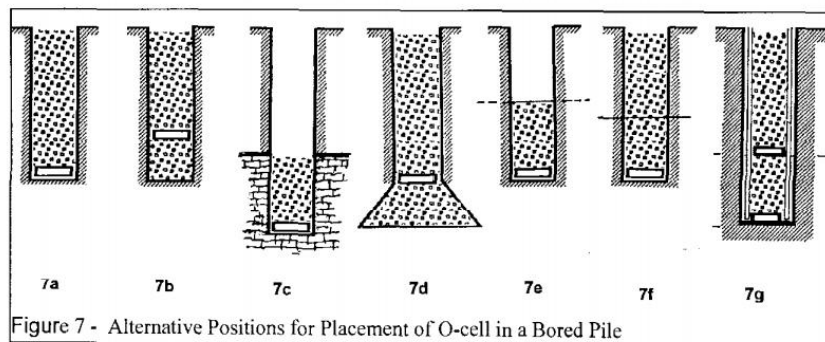


Figure 7 - Alternative Positions for Placement of O-cell in a Bored Pile

Fig. 7a. Shows the most commonly used installation where the cell is at the bottom of the hole after a small amount of concrete is placed to seat the cell. This is appropriate where the estimated side shear resistance is approximately equal to the end bearing or where the end bearing is large in comparison with the side shear and only the total ultimate side shear is to be determined.

Fig. 7b. If it is desired to determine the combined ultimate capacity of the pile, the cell is placed at a predetermined distance above the bottom. If the distance is determined correctly, then the ultimate side shear above the cell will be reached when the side shear plus the end bearing reaches its ultimate value. Though it is not possible to predetermine the exact location of the cell, experience has shown that when the upward load or downward load reaches its ultimate, often the other load is close to its ultimate.

Fig. 7c Shown is the method of determining the side shear and end bearing in a rock socket independent of the side shear of the overburden. If the additional ultimate side shear of the overburden is desired, then after testing the rock socket, the remainder of the pile can be filled with concrete and after reaching sufficient strength, the pile can be tested again.

Fig. 7d In cases where the estimated end bearing is less than the side shear, and the ultimate side shear is to be determined, then a bell can be excavated below the pile bottom and the cell placed on top of the bell.

Fig. 7e There are cases where the top of the pile is some distance below the ground surface and after installation and testing, excavation will be made for a basement. Then the pressure pipes and telltales can extend up from the top of the pile to the existing ground surface.

Fig. 7f Where the ultimate side shear of two layers are to be determined, the concrete can be filled only up to the top of the lower layer and tested. After filling the rest of the pile with concrete, it can be tested again to obtain the combined ultimate side shear of the entire pile.

Fig. 7g By using two cells with one at the bottom and the other at a predetermined distance up from the bottom, the ultimate side shear of the pile above the upper cell, the side shear of the pile below the upper cell and the ultimate end bearing can all be determined. To accomplish this, the upper cell is pressurized to determine the side shear of the pile above the cell. With upper cell extended but not under pressure, the lower cell is pressurized to determine the side shear of the pile between the two cells. Then, with the pressure valve of the upper closed, the bottom cell is pressurized and using the entire pile in shear, the end bearing is determined. This will only work, of course, if the end bearing ultimate strength is less than the total side shear of the pile.

TOP DOWN EQUIVALENT CURVE

A curve equivalent to applying the load at the top of a pile can be constructed from the upward movement-side shear curve and the downward movement-end bearing curve. This is done by determining the side shear at an arbitrary deflection point on the side shear curve. If the pile is assumed rigid, the top and bottom move the same amount and have the same deflection but different loads. By adding the side shear to the end bearing at the same deflection, a single point on the top

down equivalent curve is obtained. By repeating this process for different deflection points, the top down equivalent curve is obtained.

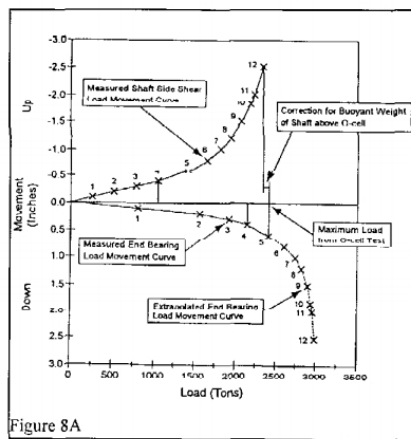


Figure 8A

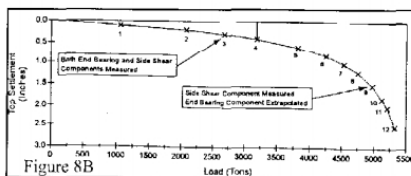


Figure 8B

Example of the Construction of a Equivalent Top-Loaded Settlement Curve (Figure 8A) from O-Cell Test Results (Figure 8B)

Figures 8A and 8B detail the process. Pick an arbitrary point such as 4 on the measured side shear curve (Fig. 8A). Find the point 4 on the measured end bearing curve which has the same deflection. Since the pile is assumed incompressible, the top of the shaft moves down the same as the bottom in a top down curve. Since the deflections at both points 4 are the same, the load for a top down test having the same deflection is the sum of the side shear (1040 tons) and end bearing at point 4 (2140 tons) which is shown at point 4 in Fig. 8B (3180 tons). By repeating the process shown by points 1-5, the equivalent top down curve equivalent to the measured side shear and measured end bearing curves is determined as shown (Fig. 8B). It so happens that point 5 is the last point on the end bearing curve.

Therefore, the end bearing curve is extrapolated to the same maximum deflection of the side shear curve (point 12). By using a hyperbolic extrapolation, points 6-12 on the end bearing curve are obtained. The process is then continued to obtained points 5-12 on the equivalent top down curve, which is the portion of the equivalent curve for which the side shear component was measured and the end bearing component was extrapolated. The same procedure can be used if the ultimate side shear is greater than the end bearing. When one component reaches ultimate before the

other, two procedures are possible. One procedure, which is extremely conservative, is to assume that the other component has also reached ultimate and that no further load increase occurs as deflection increases. The other more likely procedure is to extrapolate the curve which has not reached ultimate as shown here. The equivalent top down load-deflection curves for a few O-cell tests are shown in Figs. 18, 20, & 22.

The reconstructed top down curve is made on the basis of three assumptions:

1. The side shear-deflection curve for upward movement of the pile is the same as the downward side shear-deflection component of a conventional top down test.
2. The end bearing load-deflection curve obtained from an O-cell test is the same as the end bearing-load deflection component curve of a conventional top down test.

3. The pile is considered rigid. For bored concrete piles the compression of the pile is typically 1-3 mm.(0.04-0.12 inches) at ultimate load.

Test data discussed in the following section indicates that these assumptions, though not exactly correct, do give close agreement between the constructed top down test and actual conventional top down tests.

TESTS TO DETERMINE VALIDITY OF OSTERBERG CELL METHOD

Comparisons from Strain Gage Readings

In many of the tests made, strain gages have been installed at various levels in the bored piles. One such installation is illustrated in Fig. 9. Strain gages were installed above the O-cell at the levels shown. Each of the strain gage readings was multiplied by the Young's modulus of the concrete and the cross-sectional area to determine the load transmitted in the pile. The distribution of these forces was determined for five different forces exerted by the O-cell. It is seen that the force applied by the load cell is on the line of force distribution with depth for each of the applied loads. This and many other examples indicate that the actual force applied by the cell installed at the bottom of the pile as determined from its prior calibration agrees with the force as measured by means of the strain gages.

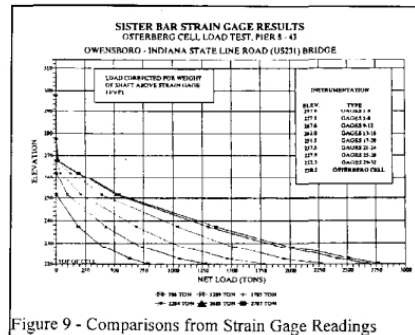


Figure 9 - Comparisons from Strain Gage Readings

Comparisons with Full Scale Load Tests made in Japan

Many tests have been made in Japan to confirm the validity of the O-cell tests (1)(2). One series of tests were made on bored piles and another series on driven piles. For the bored pile series six tests were made at different sites.

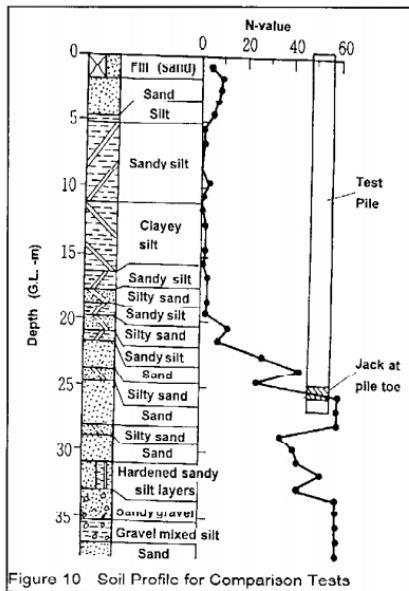


Figure 10 Soil Profile for Comparison Tests



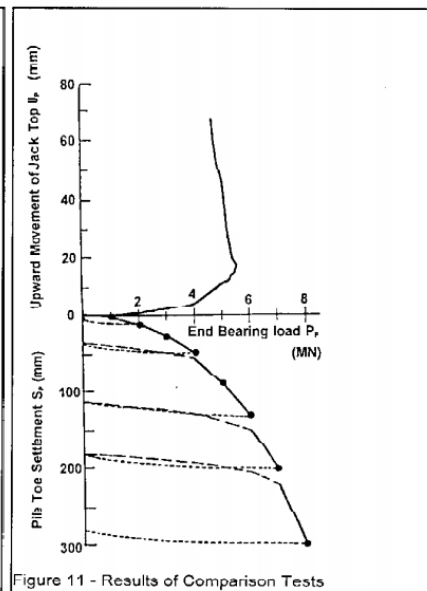


Figure 11 - Results of Comparison Tests

Fig. 10 shows the soil profile at one of these sites. The pile was 1.2 m (4 ft) in diameter and 26.5 m (87 ft) in length. The hole was bored using drilling mud and the concrete was placed under drilling mud with a tremie. The results of the test are shown on Fig. 11. The tests were carried out with four cycles of loads as is the usual practice in Japan. In this test it was predetermined that the side shear would be less than the end bearing. In order to obtain the ultimate load in end bearing, a load frame was used over the pile to hold down the pile for the additional load needed after the ultimate side shear was reached. A load cell was installed at the top of the pile. When the ultimate side shear was reached, indicated by continuous upward movement of the pile without any increase in load, the load frame was placed over the pile.

Fig. 12 (below) shows the comparison of the deflection-end bearing curve obtained from the O-cell test with that obtained from the top down test. Fig. 13 shows the comparison between the top down test and the top down load test as calculated by load transfer analysis using the side shear resistance obtained by O-cell readings. The close agreement of these curves is another indication of the validity of the Osterberg Load Test. Similar results were obtained at the five other locations.

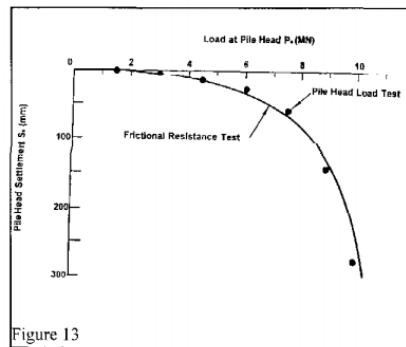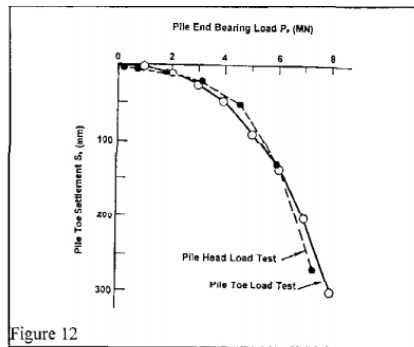

In the other series of tests on driven piles, seven tests were made, three in clay and four in sand. The soil profile for one of these test locations is shown in Fig. 14. The pile was 0.5 m (1.6 ft.) in diameter and 9 m (30 ft.) long. Fig. 15 shows the results of a test in which the O-cell was on the bottom and a calibrated jack on the top of the pile. The pile was held fixed and the O-cell pressurized to determine the end bearing independent of the side shear. The end bearing as measured from the top and that as measured from the O-cell are compared in Fig. 15. In another test at the same site, the pile was first tested by pushing up from the bottom with the O-cell and pushing down from the top with the O-cell de-pressurized so that there is no end bearing.

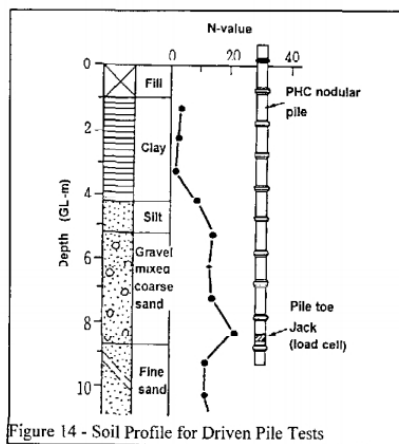


Fig. 16 shows the comparison between the side shear measured pushing up with the side shear measured pushing down. These tests results are further evidence of the validity of the O-cell test being essentially the same as a conventional top down test.

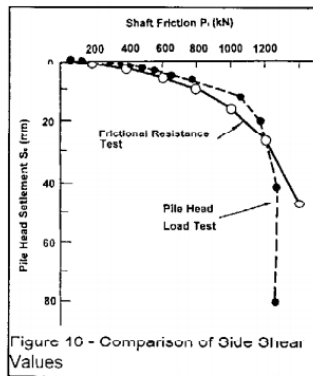


Figure 10 - Comparison of Side Shear Values

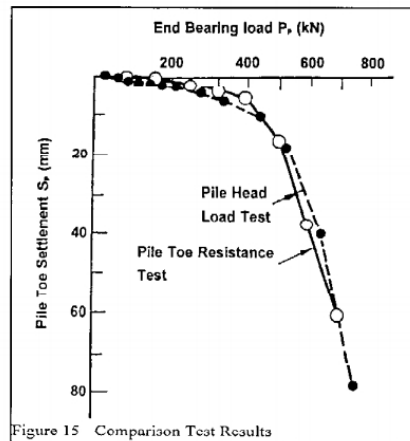


Figure 15 Comparison Test Results

CASE HISTORIES

Some typical and atypical examples are given below. New successive world records for test loads were made in recent years:

Location	Pile Diameter	Depth	Maximum Load
1. Ohio River Bridge, Kentucky	1.8 m (6 ft.)	36 m (117 ft.) from water level	54 MN (6,200 t.)
2. St. Mary's River, Georgia	1.5 m (5 ft.)	23 m (75 ft.)	65 MN (7,300 t.)
3. Penang, Malaysia	6 x 1 meters (barrette pile)	91 m (300 ft.)	97 MN (11,000 t.)
4. Apalachicola River, Florida	2.75 m (9 ft.)	39 m (127 ft.)	135 MN (15,000 t.)

Ohio River Bridge - Owensboro, Kentucky

This test was in 8 m (27 ft.) of moving water. Because of possible deep scour in the future, only the load capacity of the bottom 6 m (19 ft.) of shale was to be considered in the design. The rock consisted basically of shale with layers of coal and sandstone seams, which would be difficult to assess without actual full size testing. As shown in Fig. 17, concrete was placed some distance above the top of the shale. However, the strain gage readings in the concrete above the shale indicated that the load taken above the top of the shale was negligible compared to the load taken



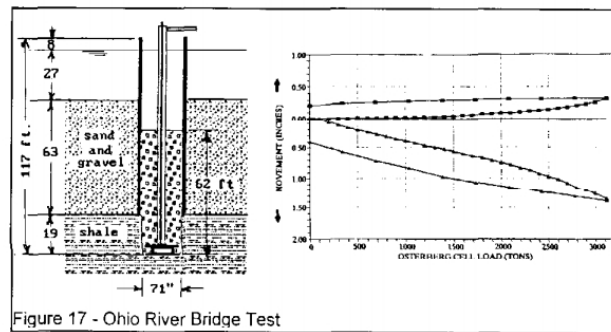


Figure 17 - Ohio River Bridge Test

by the shale socket. Since the test was designed to reach three times the design load and the ultimate capacity was much larger than anticipated, the maximum load capacity of the O-cell did not produce an ultimate in side shear or end bearing. The hole was drilled with polymer slurry.


Bridge Foundation - East Milton, Massachusetts

The soil profile consists of overburden underlain by shale. The purpose of the test was to determine the side shear and end bearing of the rock socket. The O-cell was placed at the bottom of the socket. It is seen from Figure 18A (below) that by chance the ultimate shear and ultimate end bearing occurred at virtually the same deflection, 27.6 MN at 15 mm and 28 MN at 19 mm (3,120 tons at 0.60 inches and 3,160 at 0.50 inches). Since this was a test shaft, the values of side shear and end bearing were used to design shorter piles than planned. Fig. 18B shows the equivalent top down curve with an ultimate capacity of 56 MN (6,300 tons). This also was the rated maximum capacity of the cell. The fact that the ultimate capacity in shear and end bearing was reached at almost the same load and deflection and at the maximum designed capacity of the O-cell is a circumstance which will rarely occur.

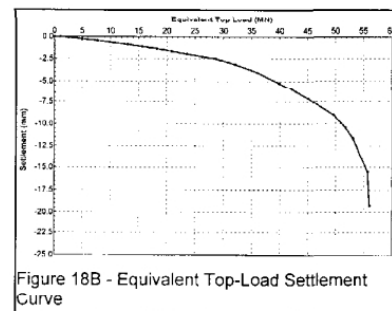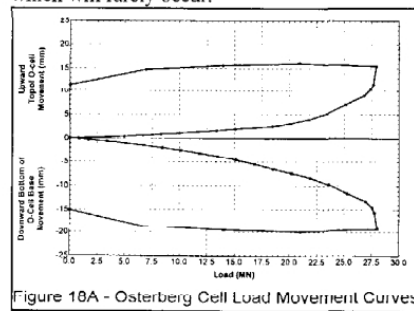

Barrette Test - Alfaro Peak, Manila, Philippines

The barrette was 0.8x2.8 m (2.8x9 ft.). The soil profile consists of 12 m (40 ft.) of silty clay under which is 2.5 m (8 ft.) of silty sand. Below this are siltstones and sandstones. The bottom of the barrette was at a depth of 28 m (92 ft.) and socketed in 13 m (43 ft.) of weak siltstone and sandstone. Fig. 19 shows the test setup. It is seen that the test was made from the present ground surface and that 12 m will be later excavated for the basement. Two O-cells were placed at the bottom of the reinforcement cage. Telltales were placed in the top of the permanent concrete at the cut-off level so that the compression of the barrette pile can be determined.

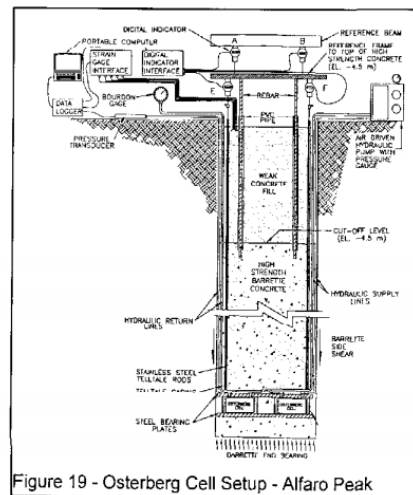

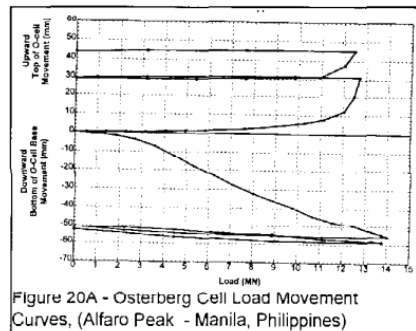


Figure 20A - Osterberg Cell Load Movement Curves, (Alfaro Peak - Manila, Philippines)

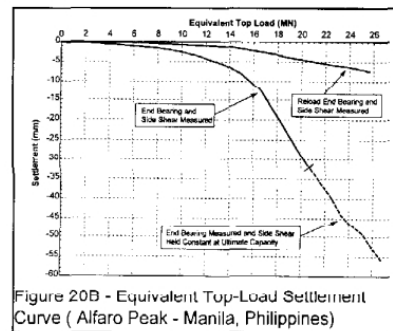


Figure 20B - Equivalent Top-Load Settlement Curve (Alfaro Peak - Manila, Philippines)

Fig. 20A shows the load-deflection curves through two cycles of loading and that the ultimate load in side shear for the second cycle occurs at about the same load as the first cycle (which is almost always observed when two or more cycles of loading are applied). However, in end bearing, the second cycle of loading resulted in 8 mm (0.30 inches) of settlement whereas the first cycle caused 55 mm (2.1 inches) settlement. Most of the settlement in the first cycle was due to disturbance below the bottom of the pile. The remarkable decrease in settlement for the second cycle indicates that the O-cell precompresses the bottom and reduces the top-down settlement shown in Fig. 20B where the lower curve shows the top down equivalent curve for the first and the second cycle of load. The results show that better cleaning of the bottom of the hole can give substantial additional end bearing load capacity to subsequent piles at the site.

World Record Test - Apalachicola River, Florida (February, 1997)

The test was made on a working pile using three O-cells installed at the same level and installed 2.1m (7 ft.) from the bottom of a 2.7 m (9.0 ft.) diameter socket 23.7 m (50 ft.) deep. The total pile length was 31 m (102 ft.) below river bottom. The water was 6.1 m (20 ft.) deep. The distance from the bottom was estimated to be at the level where the upward ultimate resistance would be approximately equal to the downward resistance (i.e. end bearing plus the side shear of the pile below the O-cells). Fig. 21, showing the two load-deflection curves, indicates that ultimate shear was reached at 65 MN (7,400 tons), not very much less than the maximum capacity of the three cells. The ultimate end bearing was not reached but it was estimated by extrapolation to be between 8,000 and 9,000 tons (70 and 80 MN). The total tested capacity was 135 MN (15,000 tons).

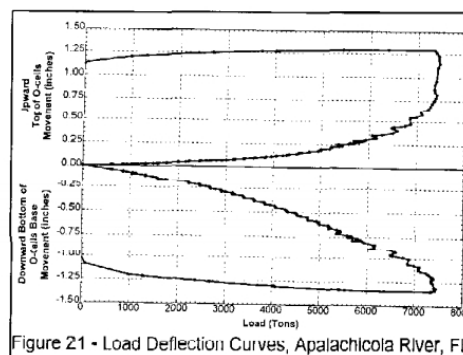


Figure 21 - Load Deflection Curves, Apalachicola River, FL

WHAT HAS BEEN LEARNED FROM THE OSTERBERG LOAD TESTS

General

When there have been no deficiencies in the process of drilling the piles, it has been found in the vast majority of tests, that the maximum test loads achieved with the O-cell is much larger than the design load including the factor of safety. In only a relatively few cases did the designer take advantage of the results to redesign the pile to achieve a more economical foundation. In many of these cases, it was considered to be too late in the construction process to make any foundation design changes. In other cases, the engineer was only interested in proving that the design was safe no matter how large the factor of safety was found to be. An extreme example of over design is shown in Fig. 22A (below). The design load was 500 tons (4.4 MN). The test was carried to over 3,000 tons (26.5 MN) with no sign of approaching failure in either side shear or end bearing. The equivalent top down load-settlement curve shown in Fig. 22B reached 5,600 tons (50 MN) with a total settlement of 0.1 inch (2.5mm)! Thus, at 11 times the design load there was virtually no settlement! The owner's engineer was very pleased that his design was safe, but no efforts were made to change to a more economical design.

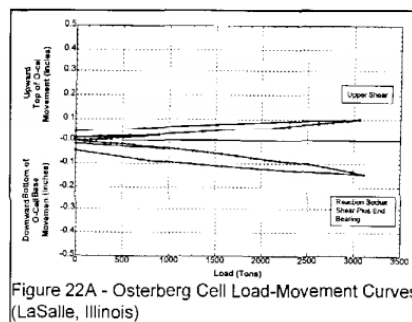


Figure 22A - Osterberg Cell Load-Movement Curves (LaSalle, Illinois)

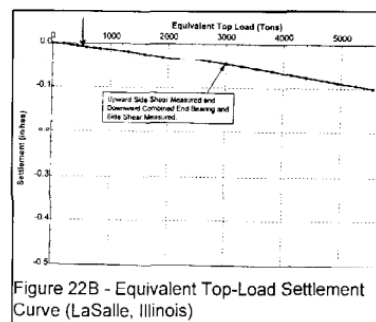


Figure 22B - Equivalent Top-Load Settlement Curve (LaSalle, Illinois)

It is understandable that, in many instances when the O-cell test is made on a working pile, the possible delay due to redesign and re negotiation with the contractor is not worth the possible savings. However, when the possible savings and time delay are not even estimated, this is not excusable. On large projects, it would be far better if a test pile (which may later become a working pile) is installed before the contract is let and the results used to make a more rational and economical design than to make the test on a working pile when construction has already begun. There have been cases in which twice the design load was reached with very little upward or downward movement, and it was ordered to go no further with the test even though the load could be increased to either the ultimate load or the capacity of the O-cell which ever occurred first. It would take very little extra time and there would be no increase in the cost of the test.

Observations Relative to Side Shear

The ultimate side shear determined in the O-cell test has almost always resulted in much larger values than estimated by the designer. In the few cases where the ultimate side shear was

about what the designer estimated or less, it was found to have been due to the way the pile hole was drilled. In one case where a pile was drilled in a lava rock, the ultimate side shear was found to be much less than one would expect. It was learned that the particular machine which drilled the hole used a drilling tool with oscillating circular motion which polished the side wall of the rock. It was found in a subsequent test using the same machine in the same type of rock at a nearby location that by slightly roughening the side wall after drilling by simply whipping a frayed cable around the hole, that the ultimate side shear was much larger.

In drilling in cohesionless or slightly cohesive soils using mineral slurry or without a slurry where there is some seepage into the hole, it is sometimes found that the ultimate side shear is less than is normally expected. It was found not to be due to the slurry per se, but due to the procedure in processing and using the slurry. See Schmertmann (3).

Observations Relative to End Bearing

Since with the O-cell, the end bearing-deflection curve is determined independently from the side shear-upward deflection curve, pile bottoms which have not been adequately cleaned of disturbed material can easily be determined from the shape of the curve. This is illustrated in Fig. 23 where it is seen that about 100 mm (4.9 inches) of downward movement occurred in end bearing. At the ultimate shear resistance, the upward plus downward movement was 160 mm (6.3 inches), which came very close to pushing the piston out of the cylinder, causing a leak and loss of pressure. Since the stroke with the standard O-cell design is 150 mm (6 inches), considerable downward movement can occur to fully compress the disturbed material and transfer the load to the undisturbed material below. A common observation for bored piles ending in sand, is that a second cycle of downward loading will yield a much smaller deflection, indicating that the first cycle precompresses the sand for subsequent loads including the design load (see Fig. 20A and B).

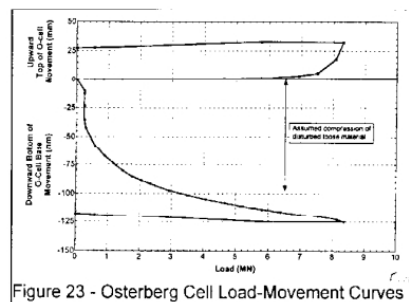



Figure 23 - Osterberg Cell Load-Movement Curves

It should be noted that in a conventional top-down test loaded to two times the design load, the side shear usually takes most of the load with very little of the load reaching the bottom. Thus, disturbed material on the bottom is not detected. Using the O-cell, bottom disturbance can be detected and action taken to more adequately clean the bottoms of subsequent holes and thus increase the load capacity of the piles.

Observations from O-cell Test Results

As stated previously, in many other bored piles tested, particularly in strong soils and rock sockets, it was found that the measured pile capacity was considerably greater than the estimated capacity. Schmertmann (4) has shown that the amount by which the excess capacity exceeds the estimated increases as the strength of the supporting material increases. He has investigated 25 tests in which there was enough information regarding the strength of the supporting medium and the engineer's estimated capacity. He found that the ratio of the measured to estimated capacity (M/E)

tends to increase as the strength of the supporting medium increases as shown in Fig.24. It is seen that for soft to hard soils, the M/E ratio varies from about 0.7 to 3. For intermediate soils such as coarse sands, dense silts, glacial tills and weathered rock, the ratio increases to about 3 to 5. For hard rock, the ratio is from 5 to above 15! Thus, somewhat ironically, the harder the medium the pile is in the more the load capacity of the pile is underestimated.

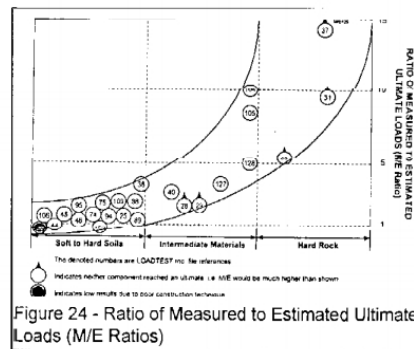

Code Requirements

Codes and governmental rules concerning drilled shafts vary widely among countries and even among the 50 United States. In one Asian country, the code requires a bored pile to be designed in side shear and does not allow any end bearing if the pile is constructed using drilling mud. In another Asian country, the code specifies that bored piles be designed using only end bearing with no side shear. One highway department in the U.S.A. has found that the bottom of bored piles are disturbed and does not allow any end bearing to be used in design. Certainly all the 300 tests made with the O-cell have shown that no matter how small, there is always some side shear and some end bearing. Where either side shear or end bearing has been found to be lower than one would expect, it has always been shown to be due to improper construction techniques. In the Boston area, because piles are driven through a soft blue clay to a very hard, high load bearing glacial till, no side shear is commonly used. Yet a 20 Inch (500 mm) pipe pile with an O-cell on the bottom and driven through 100 ft. (30 m) of the soft clay to the glacial till and tested, indicated that the driven pile had an ultimate side shear of 140 tons (1.2 MN).

SUMMARY AND CONCLUSIONS

1. Total test loads (up+down) have increased from less than 9MN (1,000 tons) to 135 MN (15,000 tons).
2. Engineers tend to seriously underpredict the capacity of bored piles when properly constructed. The underprediction tends to increase the stronger the soil and/or rock. The underprediction is the greatest for rock sockets.
3. Many engineers do not take advantage of the O-cell test results to design more economical bored piles.
4. The O-cell test method has proven to be very versatile for use in situations where the conventional top-down method is impractical, i.e. over water, in crowded and inaccessible places, testing rock sockets, and where the test loads are very large.
5. Data have been accumulated to support the validity of the O-cell test method's ability to adequately duplicate the results from conventional top-down testing.

6. The O-cell can detect defects in bored pile techniques which in most cases cannot be detected by the conventional top-down method.
7. In cases where the material below the bottom of the bored pile is disturbed, the end bearing capacity can be greatly increased by applying a preliminary load cycle.
8. The use of multilevel testing makes it possible to determine the side shear strength of different layers as well as the end bearing strength.

REFERENCES

1. OGURA, H., SUMI, M., KISHIDA, H. and YOSHIFUKA, T., (1996) "Application of the Pile Toe Test to Cast-In-Place and Precast Piles." Translated by MADAN KARKEE, Foundation Drilling Magazine, December 1996/January 1997.
2. KISHIDA, H., (1992), "Pile Testing in Osaka Amenity Park Project." Paper by Mitsubishi Co. and also briefly described in SCHMERTMANN (1993).
3. SCHMERTMANN, JOHN, & HAYES, JOHN (1997), "Observations from Osterberg Cell Tests of Bored Piles." FULCRUM, The Newsletter of the Deep Foundations Institute, Winter '96-'97 pp. 11-14.
4. SCHMERTMANN, JOHN, & HAYES, JOHN (1997), "The Osterberg Cell and Bored Pile Testing - A Symbiosis", Proceedings of the Third Annual Geotechnical Engineering Conference, Cairo University, Cairo, Egypt, January, 1997.
5. SCHMERTMANN, JOHN, & HAYES, JOHN, & MOINIT, THOMAS, & OSTERBERG, J.O., "O-Cell Testing Case Histories Demonstrate the Importance of Bored Pile (Drilled Shaft) Construction Technique" (1998), Proceedings of the Fourth International Conference on Case Histories, University of Missouri, Rolla, Missouri, March, 1998.
6. OSTERBERG, J.O., (1994) "Recent Advances in Load Testing Driven Piles and Drilled Shafts Using the Osterberg Load Cell Method", Proceedings of the Geotechnical Lecture Series, Geotechnical Division, Illinois Section, American Society of Civil Engineers, Chicago, Illinois.
7. SCHMERTMANN, JOHN (1993). "The Bottom-Up, Osterberg Method for Static Testing of Shafts and Piles", Proceedings: Progress in Geotechnical Engineering Practice. 13th Central Pennsylvania Geotechnical Seminar, Hershey, Pennsylvania.
8. OSTERBERG, J.O., (1989) New Device for Load Testing Driven Piles and Drilled Shafts Separates Friction and End Bearing", Proceedings International Conference on Piling and Deep Foundations, London, A.A. Balkema, p. 421.